

INSTALLATION INSTRUCTIONS

For Model # 1733-5-613/167

Fixture: 19 1/8" W x 18 3/4" H

WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

Assembling The Fixture (See Fig.1)

1. Carefully unpack your new fixture and put all the parts on a clear area. Make sure not to misplace any parts which are necessary for installation;
2. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from the wall, including the old **Crossbar**.
3. Thread stem with hex nut(F) into coupling(G), then slide the tube(C), cap(D), tube(C) onto stem with hex nut(F), and secure them with knurled nut(B), then thread fixture loop(A) on.
4. Put the glass shade(I) onto socket(H), and secure it with socket ring(J).

MOUNTING THE FIXTURE(See Fig.2)

1. Thread Nipple into Loop until snug.
2. Thread other end of Nipple with Loop attached into crossbar until snug.
3. Place Lock Washer over end of Nipple protruding through crossbar and thread Hex Nut onto nipple until tight.
4. Take the crossbar assembly and mount to ceiling junction box with junction box screws. Tighten screws securely with screwdriver.
5. By measuring determine correct number of links needed for proper hanging height.
6. Attach one end of the chain to the chain link. Slip Lock Collar and Canopy over the chain.
7. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
8. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the Loop and Nipple and pull until taut.

3x 100 Watts Type A19

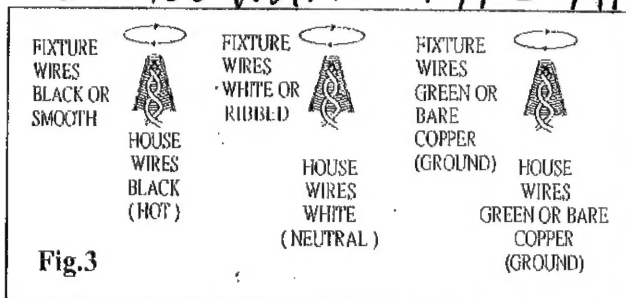


Fig.3

BOX: 18 1/2 x 15 x 11 3/4 INCH



N.W 4.8 KGS

Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

G.W 7.3 KGS



Intertek

american
lighting
association

CONNECTING THE WIRES (Fig. 3)

14. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. Wrap the fixture ground wire around the ground screw of the crossbar and then tighten the screw. Connect the remaining fixture ground wire to the supply ground wire using a wire nut. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
 15. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar(W) and thread onto ceiling Loop protruding through canopy.
 16. Install the lamp on per the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
- Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.2


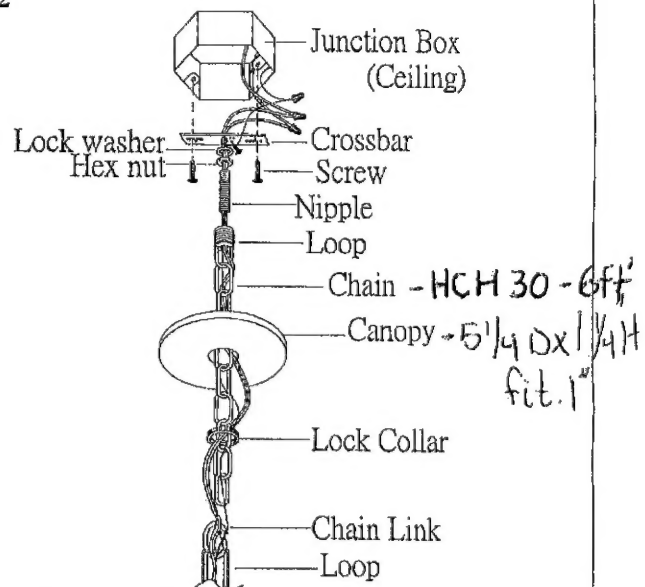


Fig.1

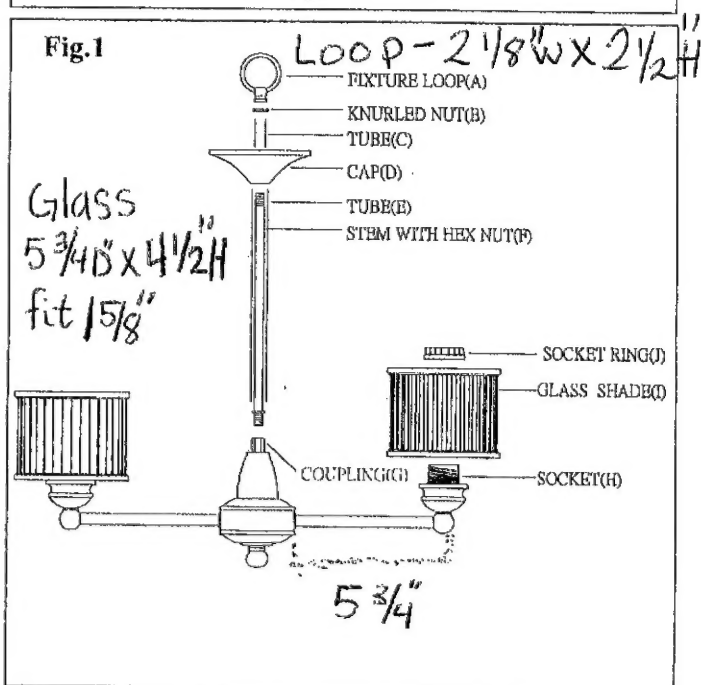

INSTALLATION INSTRUCTIONS

For Model # 1733,5-613/167


WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

Assembling The Fixture (See Fig.1)

1. Carefully unpack your new fixture and put all the parts on a clear area. Make sure not to misplace any parts which are necessary for installation;
2. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from the wall, including the old Crossbar.
3. Thread stem with hex nut(F) into coupling(G), then slide the tube(C), cap(D), tube(C) onto stem with hex nut(F), and secure them with knurled nut(B), then thread fixture loop(A) on.
4. Put the glass shade(I) onto socket(H), and secure it with socket ring(J).

MOUNTING THE FIXTURE(See Fig.2)

1. Thread Nipple into Loop until snug.
2. Thread other end of Nipple with Loop attached into crossbar until snug.
3. Place Lock Washer over end of Nipple protruding through crossbar and thread Hex Nut onto nipple until tight.
4. Take the crossbar assembly and mount to ceiling junction box with junction box screws. Tighten screws securely with screwdriver.
5. By measuring determine correct number of links needed for proper hanging height.
6. Attach one end of the chain to the chain link. Slip Lock Collar and Canopy over the chain.
7. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
8. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the Loop and Nipple and pull until taut.

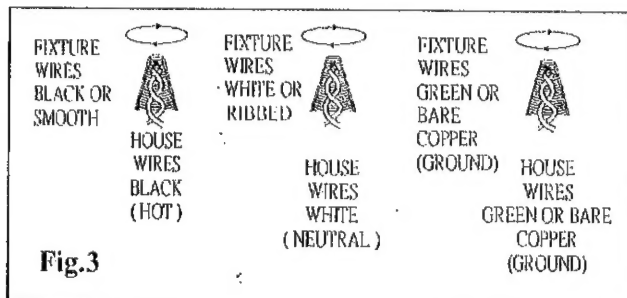

CONNECTING THE WIRES (Fig. 3)

14. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. Wrap the fixture ground wire around the ground screw of the crossbar and then tighten the screw. Connect the remaining fixture ground wire to the supply ground wire using a wire nut. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
 15. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar(W) and thread onto ceiling Loop protruding through canopy.
 16. Install the lamp on per the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
- Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.2


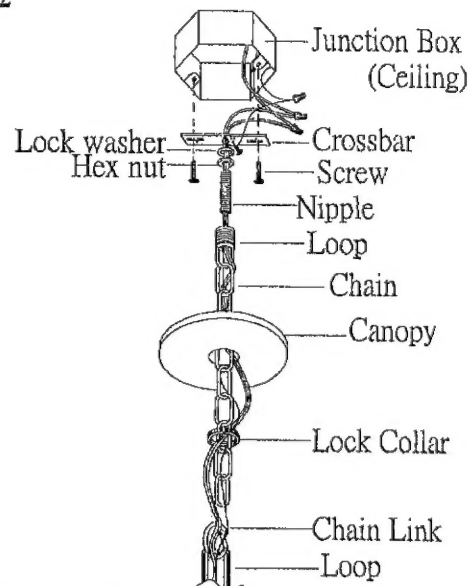


Fig.1



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

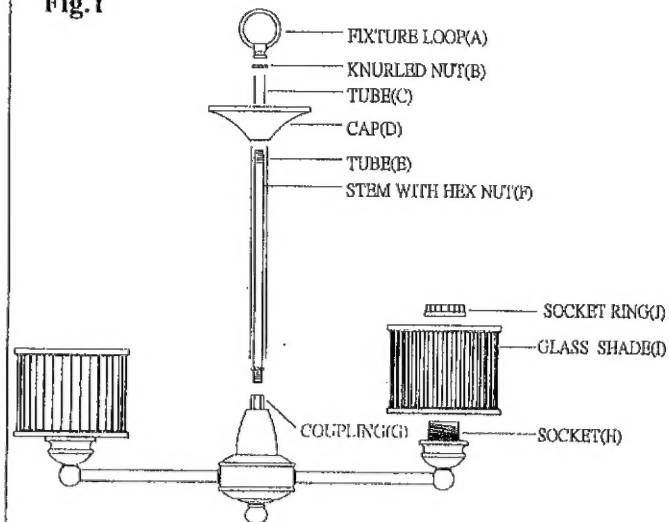

american
lighting
association